

Perimeter trims for standard perimeter solutions with mineral and wood ceilings

**Key features**

- Comprehensive range including angle trims, shadowline trims and F-upstand trims


**Application areas**

- All ceilings - Perimeters

**Physical data**

- Material: steel
- Surface finish: baked polyester paint
- Colour: all products standard in Global White
- Other standard colours available on popular items


■ **Armstrong PRELUDE Perimeter Trims | L-trims**

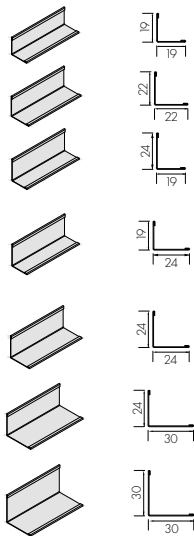

Item reference	Dimensions (mm)		Content/carton pcs	Content/carton lm	Weight/carton kg	Cartons/ pallet
	Length	Thickness				
T1919HD	3000	0.45	36	108.00	19.3	54
T2222HA	3000	0.46	36	108.00	20.0	48
T1924HD	3000	0.53	36	108.00	22.7	49
T1924LC <sup>[A]</sup>	3050	0.475	36	109.80	16.4	48
T2419H <sup>[1][2][3]</sup>	3000	0.45	36	108.00	18.3	49
T1929H	3000	0.45	36	108.00	21.8	49
T2424HD	3050	0.45	36	109.80	22.0	48
T3024HA	3000	0.45	30	90.00	19.5	48
T3030H <sup>[1][4]</sup>	3000	0.54	30	90.00	25.0	60

Available in <sup>[1]</sup> Black <sup>[2]</sup> RAL 9006 <sup>[3]</sup> RAL 9010 <sup>[4]</sup> galvanized  
<sup>[A]</sup> Corrosion resistant version


■ **Armstrong PRELUDE Perimeter Trims | W-trims**

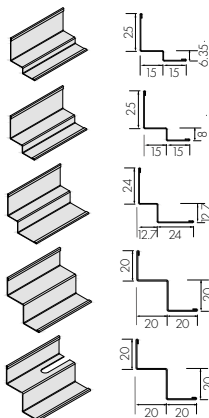

Item reference	Dimensions (mm)		Content/carton pcs	Content/carton lm	Weight/carton kg	Cartons/ pallet
	Length	Thickness				
T1506H	3050	0.45	36	109.80	26.3	48
T1508HB <sup>[1][2][3]</sup>	3050	0.45	36	109.80	27.1	48
7875G	3050	0.45	30	91.44	25.0	12
T2020HH	3000	0.65	20	60.00	24.0	48
T2121HH <sup>[B]</sup>	3000	0.60	15	45.00	20.0	40

Available in <sup>[1]</sup> Black <sup>[2]</sup> RAL 9006 <sup>[3]</sup> RAL 9010  
<sup>[B]</sup> Slotted for air circulation


## ■ Armstrong PRELUDE Perimeter Trims | C-trims



Item reference	Dimensions (mm)		Content/carton		Weight/carton kg	Cartons/ pallet
	Length	Thickness	pcs	lm		
T2040HC <sup>(2)</sup> <sup>(3)</sup>	3050	0.45	20	61.00	18.10	32


Available in <sup>(2)</sup> RAL 9006 <sup>(3)</sup> RAL 9010

## ■ Armstrong PRELUDE Perimeter Trims | F-trims



Item reference	Dimensions (mm)		Content/carton		Weight/carton kg	Cartons/ pallet
	Length	Thickness	pcs	lm		
7852I	3000	0.45	20	60.00	21.60	24
7856I	3000	0.45	20	60.00	21.60	24

## ■ Armstrong PRELUDE Perimeter Trims | Accessories

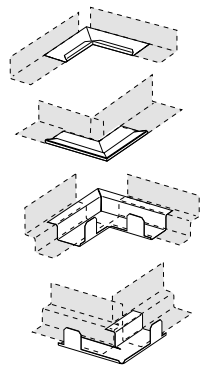

Item reference	Description	Dimensions (mm)
		Length
A 328 G	19 mm Inner Corner (Global White)	58.0
A 329 G	19 mm Outer Corner (Global White)	65.5
A 330 G	24 mm Inner Corner (Global White)	58.0
A 331 G	24 mm Outer Corner (Global White)	65.5
A 332 G	Inner Corner for Perimeter W-trim T 1508 HB (Global White)	72.0
A 333 G	Outer Corner for Perimeter W-trim T 1508 HB (Global White)	57.2

<b>Fire reaction</b>	Euroclass <b>A1</b> as per EN 13501-1	<b>RUS KMO (NG) / KM1 (G1, V1, D1, T1)</b> as per 123-FZ
<b>Indoor air quality</b>	A+ ISO 3	
<b>Cleanability</b>		
<b>Sustainability</b>	25%	
<b>Design options</b>		

All measurements in millimetres. All sizes are nominal.